

WASHING TANK

The universal washing tank is suitable for quick-washing of parts and components in general. The washing liquid, moved by the low-pressure pneumatic system, enables two types of washing:

- continuous liquid flow with brush for thorough washing
- by dipping, i.e. with the parts dipped in the liquid directly in the tank.



Art. 0A60065 (65 l)




Art.
0A60028

Washing with brush, with continuous liquid flow.



Dip washing, with parts placed in the tank.

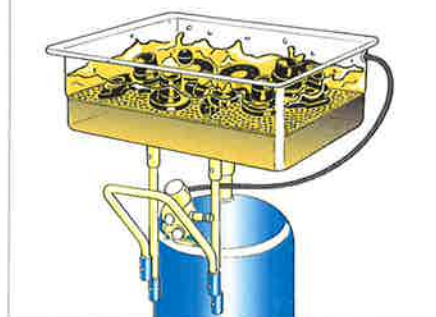

Art. 0A60065

Universal washing tank with removable cover assembled on the 65-litre wheel-mounted tank. The cleaning tank comes with two extra spare brushes Art. 0A60028

📦 N° 2 packing m³ 0,290 📦 Kg 47,1


Art. 0A60028

Knurled bristle brush.

The knurled bristles (i.e. scraping) easily remove the dirt from parts being cleaned



OVERALL DIMENSIONS (mm)

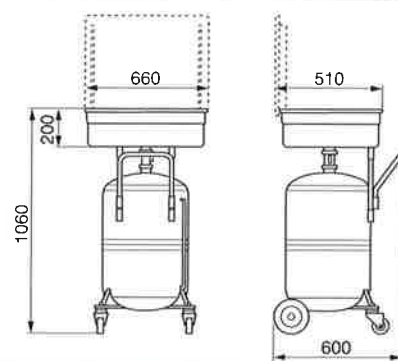

Article	0A60065
Tank capacity	65 l
Washing tank capacity	50 l
Max. working pressure	0,5 bar
Required quantity of liquid	50 l
Max. gun pressure	12 bar