


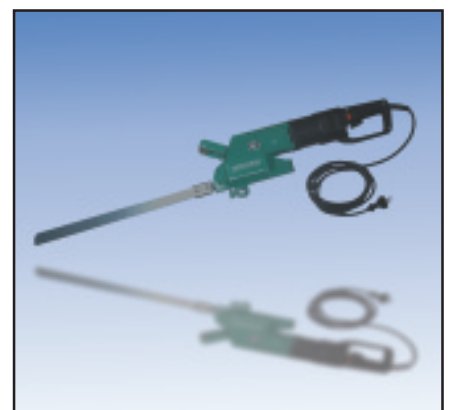
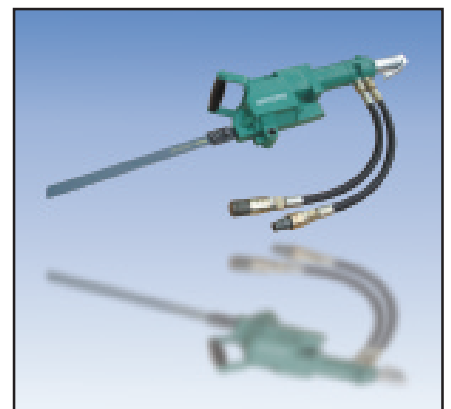
TOOLS FOR THE SPECIALIST RECIPROCATING SAWS

PNEUMATIC 

HYDRAULIC 

ELECTRIC 

ATEX
Guideline 94/9 EC



MACHINE FEATURES





Saw blade



Handle



Safety lever control with sensor block or safety twist throttle

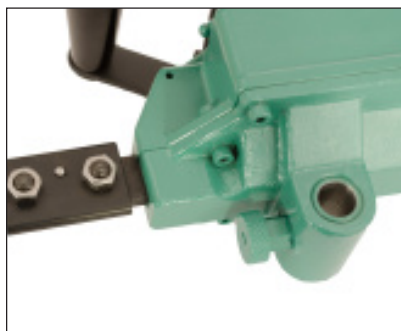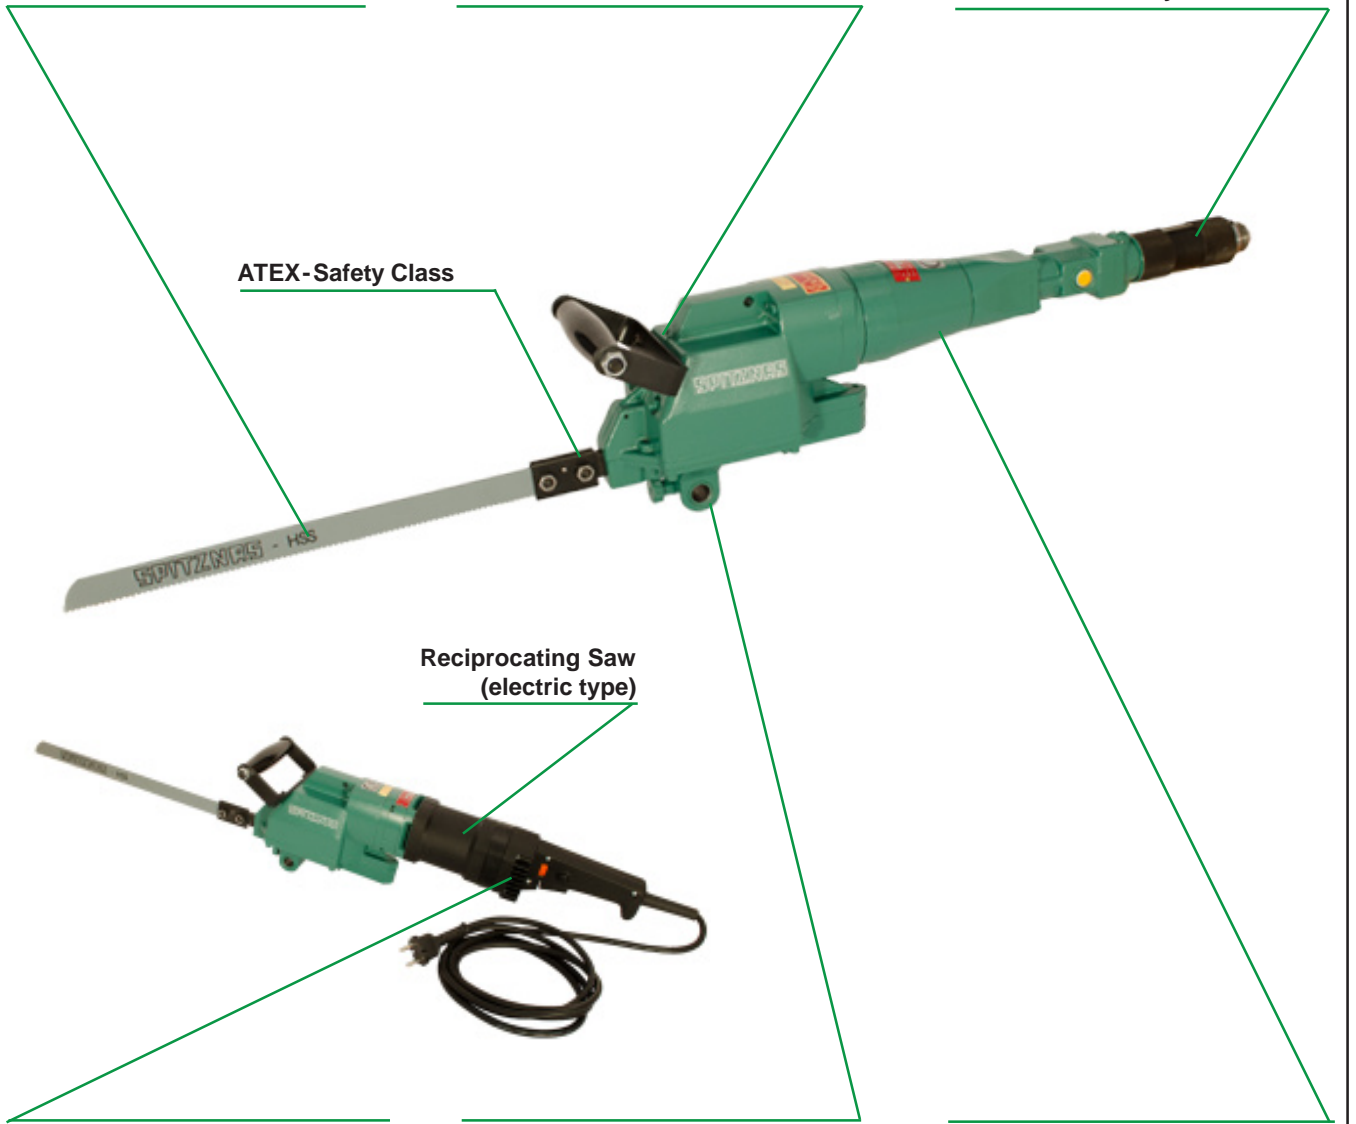

TECHNICAL SPECIFICATION

PNEUMATIC - Industrial/ Mining Design

Our favourite pneumatic reciprocating saw with ATEX approval for industry and mining.



Order no.	ATEX Guideline 94/9 EC	Housing material	Valve type	Power kW	Stroke mm	Number of strokes rpm	Air consumption m ³ /min	Vibration level m/s ²	Noise level dB(A)	Connection	Hose ID mm	Weight kg
5 1212 0010	II2GcT5	aluminium	twist	1.1	60	330	1.45	<2.5	84	R 3/4" male	13	6.4
5 1212 0050	II2GcT5	aluminium	lever	1.1	60	330	1.45	<2.5	84	R 3/4" male	13	6.4
5 1213 0010	IM2cT5	zamak	twist	1.1	60	330	1.45	<2.5	84	R 3/4" male	13	10.6

Subject to technical change. Performance data at an operating pressure (flow pressure) of 6 bar.

HYDRAULIC - Industrial Design

Our hydraulic reciprocating saw with powerful drive and increased cutting speed.



Order no.	ATEX Guideline 94/9 EC	Housing material	Valve type	Power kW	Stroke mm	Number of strokes rpm	Oil flow l/min	Vibration level m/s ²	Noise level dB(A)	Connection	Hose ID mm	Weight kg
5 1220 0010	II2GcT5	aluminium	twist	2.8	60	500	10-50	<2.5	86	12 S	12	6.1
5 1220 0050		aluminium	lever	2.8	60	500	10-50	<2.5	86	12 S	12	6.1
5 1223 0010	IM2cT5	zamak	twist	2.8	60	300	20-50	<2.5	86	M14x1,5	12	13.0
5 1223 0050	IM2cT5	zamak	lever	2.8	60	300	20-50	<2.5	86	M14x1,5	12	10.5

Subject to technical change. Performance data at an operating pressure (flow pressure) of 140 bar.

ELECTRIC - Industrial Design

The cutting speed of this electrically driven reciprocating saw is infinitely adjustable, by which the saw is ideal for cutting plastics.



Order no.	Housing material	Valve type	Power input kW	Rated voltage V	Safety class	Frequency Hz	Vibration level m/s ²	Noise level dB(A)	Stroke mm	Number of strokes 1/min	Weight kg
5 1215 0050	aluminium	button	1.2	230	II	50	3.0	86	60	200-400	7.8
5 1215 0070	aluminium	button	1.2	110	II	40-60	3.0	86	60	200-400	7.8

Subject to technical change. Noise supression according to DIN VDE 0875, EN 55014 and 8089/336/EWG.

ACCESSORIES

Service Units

Order no. Description

9 2406 0260 Portable service unit with pressure regulator 3/4"

9 2406 0650 Portable service unit with protection housing and pressure regulator 3/4"



Pipes and Fittings

Order no. Description


9 3610 0410 Pneumatic pressure hose ID 13 mm; 2,5 m length; screw-on claw coupling

9 3610 0420 Pneumatic pressure hose ID 16 mm; 2,5 m length; screw-on claw coupling

9 3610 0430 Pneumatic pressure hose ID 19 mm; 2,5 m length; screw-on claw coupling

9 2102 0020 Claw coupling, metal sealing, 3/4" I.D.

2 1317 9010 Hydraulic pressure hose set for type 5 1220 and 5 1223



Other Accessories

Order no. Description

9 9910 0080 Carrying case for type 5 1212 and 5 1213

5 1212 9000 Carrying case for type 5 1220, 5 1223 and 5 1215

9 9902 0120 Multi oil



SAWS PRODUCT RANGE

BAND SAWS



SABRE SAWS




CHAIN SAWS



RECIPROCATING SAWS



CIRCULAR SAWS



PIPE CUTTING MACHINES



SPITZNAS

Maschinenfabrik GmbH, Fellerstraße 4, D-42555 Velbert, Germany

Tel: +49-(0)2052-605-0

Fax: +49-(0)2052-605-29

E-Mail: sales@spitznas.com

Internet: <http://www.spitznas.com>