

TOOLS FOR THE SPECIALIST TORQUE WRENCHES

PNEUMATIC




OPER. PRESSURE
4-6 BAR

ATEX
Guideline 94/9 EC



Type
6 5002 0020

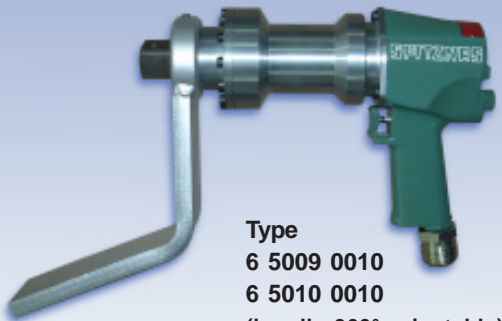

Type
6 5009 0010
6 5010 0010
(handle 360° orientable)



Type
6 5003 0010

For use in underground mining !

TECHNICAL DATA

Order No.	ATEX Guideline 94/9 EC	Square drive	for bolts up to	Width across flats	Tightening torque at flow pressure		Air consumption at flow pressure		Hose I.D.	Air connection	Direction of rotation/reversible	Weight without torque arm	Weight of torque arm	Noise level	Vibration level
					4 bar	6 bar	4 bar	6 bar							
6 5009 0010*	IM2cT6	1"	M30	30-50	650	750	0.55	0.80	10	Rd32x1/8"male	right/left	7.8	2.4	86.4	<2.5
6 5002 0020	IM2cT6	1"	M30	30-50	1,500	1,800	0.55	0.65	10	Rd32x1/8"male	right/left	8.6	1.8	86.4	<2.5
6 5010 0010*	IM2cT6	1"	M30	30-50	1,500	1,800	0.55	0.65	10	Rd32x1/8"male	right/left	8.6	1.8	86.4	<2.5
6 5003 0010	IM2cT6	1 1/2"	M48	55-75	2,800	3,600	1.30	1.70	10	Rd32x1/8"male	right/left	14.9	3.2	93.0	<2.5

* handle 360° orientable