




SPITZNAS

TOOLS FOR THE SPECIALIST CIRCULAR SAWS

PNEUMATIC




ATEX
Guideline 94/9 EC

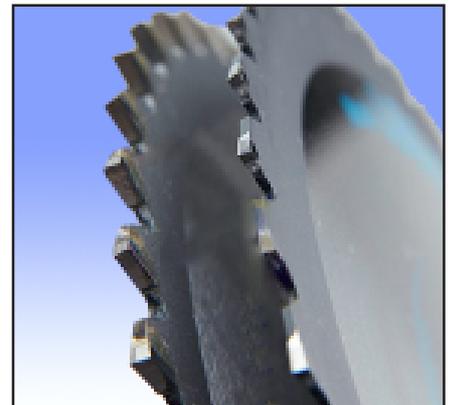

MACHINE FEATURES




Safety button valve with preventive starting lock

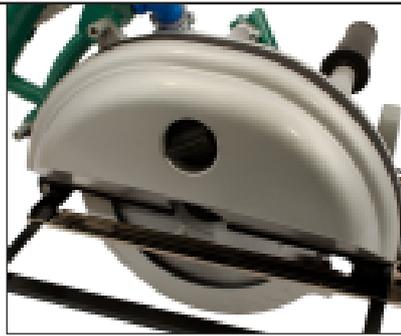

Protection cover with chip container



Mitre cuts

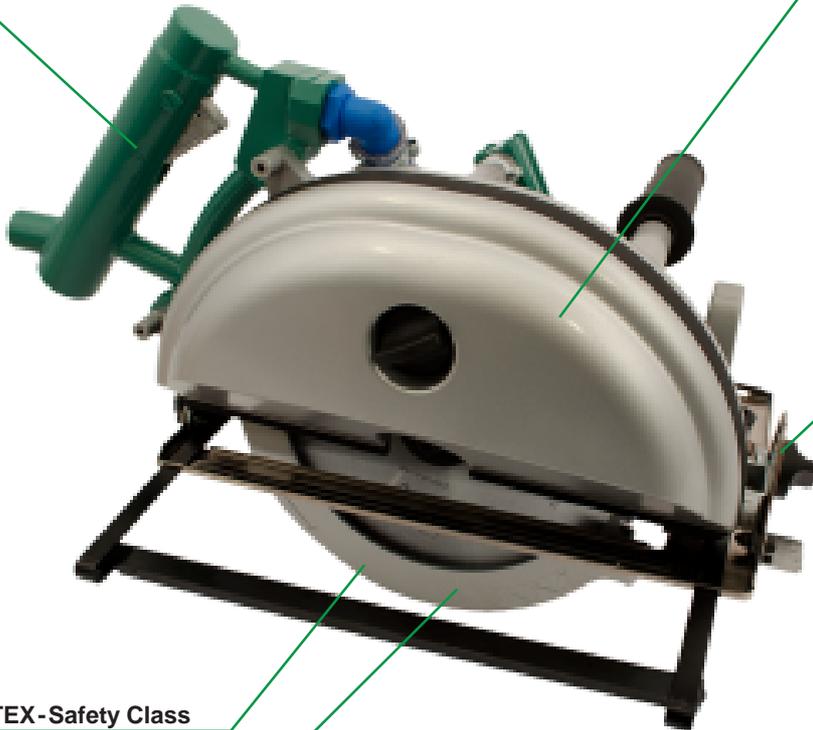


ATEX-Safety Class

Cold-Cutting (dry cutting saw blade)

Additional handle

Adjustable cutting depth

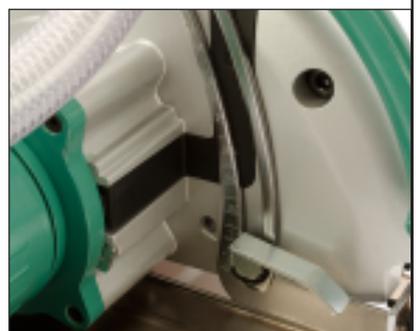

TECHNICAL SPECIFICATION

PNEUMATIC- Circular saw

As standard, our circular saw has a device for parallel cuts and mitre cuts up to 45°.



	Max. saw blade dia.	Max. cutting depth at 90°	Max. cutting depth at 45°	Adapter for saw blade dia.	Power kW	Free speed rpm	Air consumption m ³ /min	Connection	Noise level dB(A)	Vibration level m/s ²	Hose ID mm	Weight kg
Order no.	mm	mm	mm	mm								
5 1116 0010	190	65	40	30/20/19/16	1.3	3,250	1.5	R 1/2"female	95.4	<2.5	≥13	6.5

Subject to technical change. Performance data at an operating pressure of 6 bar.

PNEUMATIC - Metal circular saw

As standard, our circular saw has a device for parallel cuts and mitre cuts up to 45°.



	ATEX Guideline 94/9 EC	Max. saw blade dia.	Max. cutting depth at 90°	Max. cutting depth at 45°	Adapter for saw blade dia.	Power kW	Free speed rpm	Air consumption m ³ /min	Connection	Noise level dB(A)	Vibration level m/s ²	Hose ID mm	Weight kg
Order no.		mm	mm	mm	mm								
5 1115 0010	II2GcT5	230	84	56	30/25,4/20	1.5	1,700	2.0	R 1/2" female	103.3	<2.5	≥13	8.6


Subject to technical change. Performance data at an operating pressure of 6 bar.

ACCESSORIES




Saw Blades (usable for dry cutting)

Order no.	Diameter mm	Number of teeth	Width mm	For type	Application
9 2503 0120	180	36	1,85	5 1116	Metal grids Trapezoidal sheets
9 2503 0110	230	60	1,4	5 1115	Sandwich panels Thin metal sheets Thin metal profiles Cable channels Roller shutter pipes

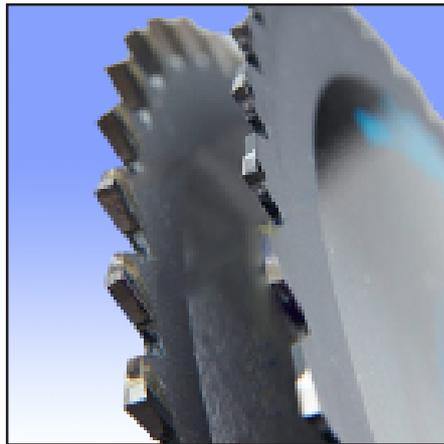

Features of the saw blades :

- shock resistant
- optimized cutting performance due to saw blade width of 1.4 mm
- 35% less chips, therefore reduced CO₂ emission
- quick and efficient
- Cold-Cutting (dry cutting) - technology

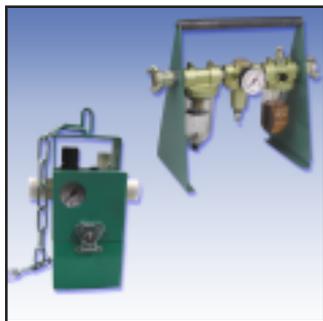

Portable Service Unit with pressure regulator

Order no.	Thread connection	Contents of oil	Max. flow
9 2406 0260	3/4"male	300 cm ³	3.500 l/min

Portable Service Unit with protection housing and pressure regulator


Order No.	Thread connection	Contents of oil	Max. flow
9 2406 0630	1/2"male	50 cm ³	1.100 l/min
9 2406 0650	3/4"male	125 cm ³	3.500 l/min

SAWS PRODUCT RANGE

BAND SAWS



SABRE SAWS



CHAIN SAWS



RECIPROCATING SAWS



CIRCULAR SAWS



PIPE CUTTING MACHINES



SPITZNAS

Maschinenfabrik GmbH, Fellerstraße 4, D-42555 Velbert, Germany
 Tel: +49-(0)2052-605-0 Fax: +49-(0)2052-605-29
 E-Mail: sales@spitznas.com Internet: http://www.spitznas.com

08/12 E